



DCA300SSC


WhisperWatt™ Generator

WhisperWatt™ 300

Prime Rating: 240 kW (300kVA)

Standby Rating: 264 kW (330 kVA)

60 Hertz

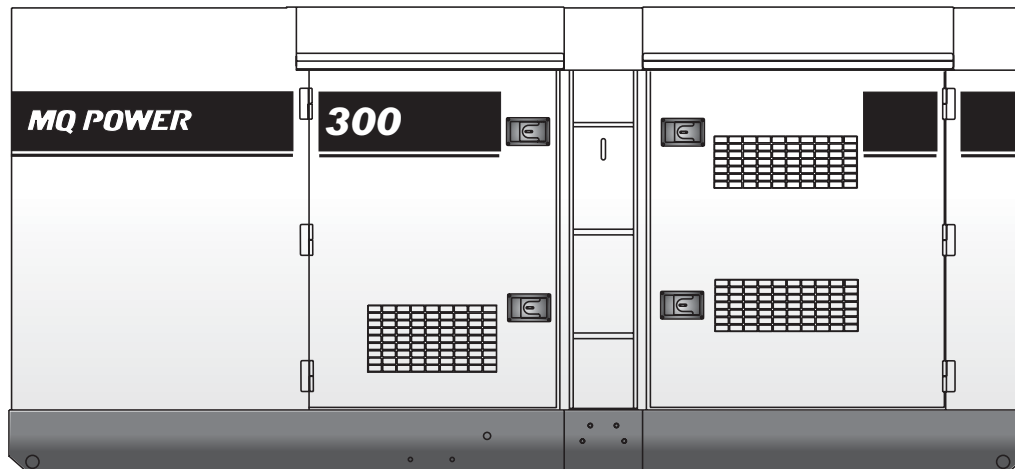

Standard Features

- **Heavy duty, turbocharged, direct injection diesel engine** provides maximum reliability.
- **Brushless alternator** reduces service and maintenance requirements and meets temperature rise standards for Class F insulation systems.
- **Open delta alternator design** provides virtually unlimited excitation for maximum motor starting capability.
- **Automatic voltage regulator (AVR)** provides precise regulation.
- **Electronic governor system with idle switch** maintains frequency to $\pm 0.25\%$.
- **Full load acceptance** of standby nameplate rating in one step (NFPA 110, para 5-13.2.6).
- **Sound attenuated, weather resistant, steel housing** provides operation at 73 dB(A) at 23 feet. Fully lockable enclosure allows safe unattended operation.
- **Internal fuel tank** with direct reading fuel gauges are standard.
- **Fuel / water separator** removes condensation from fuel for extended engine life.
- **E-Coat primer** with polyurethane enamel finish coat.
- **Low coolant level shutdown system** provides protection from critically low coolant levels. Includes control panel warning light.
- **Complete engine analog instrumentation** includes DC ammeter, oil pressure gauge, water temp. gauge, tachometer/hour meter, preheat indicator, manual engine speed control, emergency shutdown monitors, and emergency stop button.
- **Complete generator analog instrumentation** includes voltage regulator control, ammeter phase selector switch, voltmeter phase selector switch, AC voltmeter, AC ammeter, frequency meter, panel light, and circuit breaker.
- **Automatic safety shutdown system** monitors the water temperature, engine oil pressure, overspeed, and overcrank. Warning lights indicate abnormal conditions.
- **Auto start/stop control** allows generator to start automatically in the event of a commercial power failure.
- **Complete power panel.** Fully covered; three-phase terminals and single phase receptacles allow fast and convenient hookup for most applications including temporary power boxes, tools and lighting equipment. All are NEMA standard.
- **Two stage air filter**
- **Simultaneous single and three phase power.**
- **Emergency stop switch.**
- **Battery switch**
- **Documentation box**
- **EPA emissions certified.** - Tier 3 emissions compliant.



DCA300SSC

WhisperWatt™ Generator

Generator Specifications

| | |
|---|--|
| Design | Revolving field, Self-ventilated Drip-proof, Single bearing |
| No. of Poles | 4-pole |
| Excitation | Brushless with AVR |
| Standby Output | 264 KW (330 KVA) |
| Prime Output | 240 KW (300 KVA) |
| Generator RPM | 1800 |
| Voltage — 3Ø | 208, 220, 240, 416, 440, 480V Reconnectable |
| Voltage — 1Ø | 120, 127, 139, 240, 254, 277V Adjustable |
| Armature Connection | Star with neutral |
| Voltage Regulation (No load to full load) | ±0.5% |
| Power Factor | 0.8 |
| Frequency | 60 Hz |
| Frequency Regulation: No Load to Full Load | Isochronous under varying loads from no load to 100% rated load |
| Frequency Regulation: Steady State | ±0.25% of mean value for constant loads from no load to full load |
| Insulation | Class F |
| Sound Level dB(A) Full load at 23 ft | 73 |

Engine Specifications

| | |
|-------------------------------|--|
| Make/Model | Cummins / QSL9-G3 |
| Emissions | EPA Tier 3 Certified |
| Starting System | Electric |
| Design | 4-cycle water cooled, direct injection, turbocharged, charge air cooled |
| Displacement | 8900 cc |
| No. cylinders | 6 |
| Bore x Stroke (mm) | 114 x 145 |
| Gross Engine Power Output | 399 hp (297 kW) |
| BMEP | 287 psi (1979 kPa) |
| Piston Speed | 1707 ft/min (8.7 m/s) |
| Compression Ratio | 17.8 : 1 |
| Engine Speed | 1800 rpm |
| Overspeed Limit | 2040 rpm |
| Oil capacity gallons (liters) | 7.0 (26.5) |
| Battery | 150Ah x 2 (24V system) |

Fuel System

| | |
|--------------------------------|--------------------------|
| Recommended Fuel | ASTM-D975-No.1 & No. 2-D |
| Maximum Fuel Flow (per hour) | 22 gal (83 L) |
| Maximum Inlet Restriction (Hg) | 6.0 in. (152 mm) |
| Fuel Tank Capacity | 129 gal (490 L) |
| Fuel Consumption | |
| full load gph (lph) | 19.0 (72.0) |
| 75% load gph (lph) | 15.5 (58.6) |
| 50% load gph (lph) | 11.1 (41.9) |
| 25% load gph (lph) | 5.9 (22.4) |

Cooling System

| | |
|----------------------------------|-------------------|
| Fan Load | 12 hp (9 kW) |
| Coolant Capacity (with radiator) | 11.3 gal (43.0 L) |
| Coolant Flow Rate | 60.5 gal (229 L) |
| Heat Rejection to Coolant | 6310 Btu (6.6 MJ) |
| Maximum Coolant Friction Head | 5.0 psi (35 kPa) |
| Maximum Coolant Static Head | 60 ft (18 m) |
| Ambient Temperature Rating | 104°F (40°C) |

Air

| | |
|---------------------------------|------------------------------------|
| Combustion Air | 770 cfm (21.8 m³/min) |
| Maximum Air Cleaner Restriction | 25 in. H ₂ O (6.25 kPa) |
| Alternator Cooling Air | 2797 cfm (79.0 m³/min) |
| Radiator Cooling Air | 7946 cfm (225 m³/min) |

Exhaust System

| | |
|-----------------------|--------------------------------------|
| Gas Flow (full load) | 2040 cfm (57.9 m³/min) |
| Gas Temperature | 1035°F (560°C) |
| Maximum Back Pressure | 40.8 in. H ₂ O (10.2 kPa) |

Amperage

| Rated Voltage | Maximum Amps |
|-----------------------------------|---------------------|
| 1Ø 120 Volt | 666.7 Amps (4 wire) |
| 1Ø 240 Volt | 333.3 Amps (4 wire) |
| 3Ø 240 Volt | 722 Amps |
| 3Ø 480 Volt | 361 Amps |
| Main Line Circuit Breaker Rating | 800 Amps |
| Over Current Relay Trip Set Point | 361 Amps |

Warranty*

Cummins Engine

12 months from date of purchase with unlimited hours.

Generator

24 months from date of purchase or 2000 hours (whichever occurs first).

Trailer

12 months excluding normal wear items.

*Refer to the express written, one-year limited warranty sheet for additional information.

Generator is not intended for use in enclosed areas or where free flow of air is restricted. Backfeed to a utility system can cause electrocution and/or property damage. Do not connect to any building's electrical system except through an approved device.

Specifications are subject to change without notice.



DCA300SSC WhisperWatt™ Generator

MQ POWER DECIBEL LEVELS



Our soundproof housing allows substantially lower operating noise levels than competitive designs. WhisperWatts are at home on construction sites, in residential neighborhoods, and at hospitals — just about anywhere.

- 90 — Subway / truck traffic
- 80 — Average city traffic
- 70 — Inside car at 60 mph
- 60 — Air conditioner at 20 feet
- 50 — Normal conversation



Generator Output Panels

CIRCUIT BREAKERS
TWIST LOCK AND GFCI
RECEPTACLES

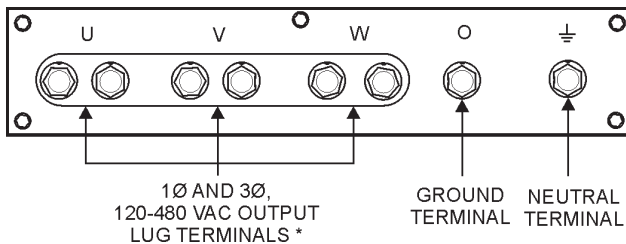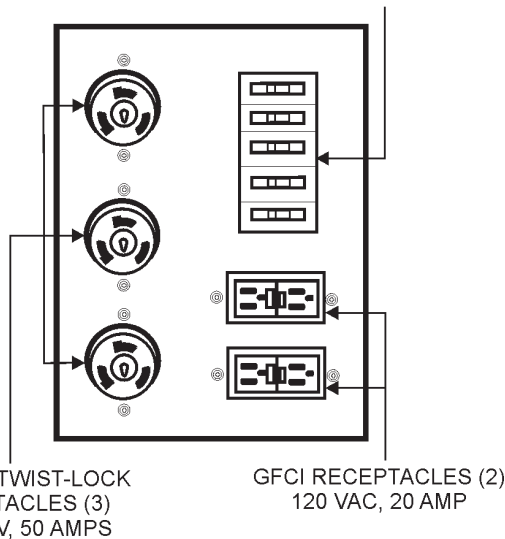

Optional Generator Features

- Battery charger** — provides fully automatic and self-adjusting charging to the generator's battery system.
- Jacket water heater** — for easy starting in cold weather climates.
- Special batteries** — long life batteries provide extra engine cranking power.
- Spring Isolators** — provides extra vibration protection for standby applications.
- Trailer mounted package** — highway legal trailer with electric or surge brakes with triple axle configuration. Extra capacity fuel tanks are also available.

Optional Control Features

- Remote speed adjust rheostat** — allows for engine speed adjustment from the control panel.
- Audible alarm** — alerts operator of abnormal conditions.

Optional Fuel Cell Features

- Trailer fuel tank** — a second fuel cell located in the trailer allows for extended run time.
- Subbase fuel cells (double wall)** — Additional fuel cell for extended runtime operation. Contains a leak sensor, low fuel level switch, and a secondary containment tank. UL142 listed.
 - 12 hours of minimum run time.
 - 24 hours of minimum run time.

Optional Output Connections



- Cam-Loks** — provides quick disconnect alternative to bolt-on connectors.
- Pin and Sleeve connectors** — provides industry standard connectors for all voltage requirements.
- Output cable** — available in any custom length and size configuration.



DCA300SSC


WhisperWatt™ Generator

Dimensions

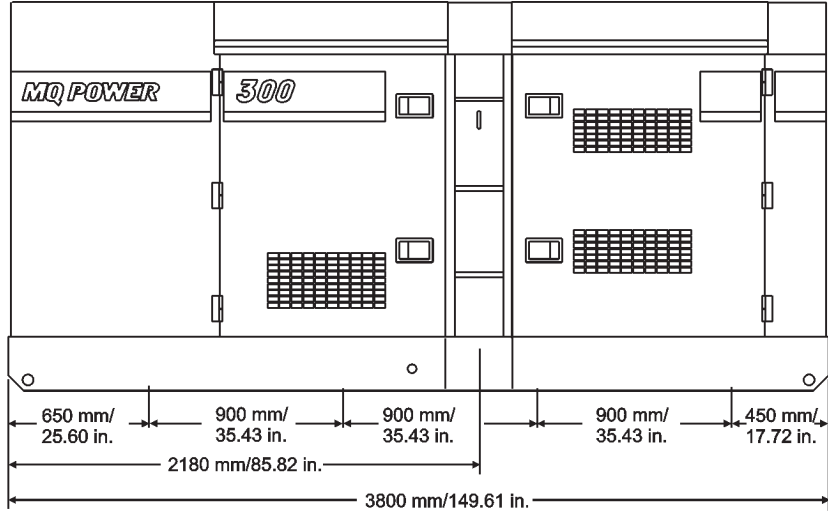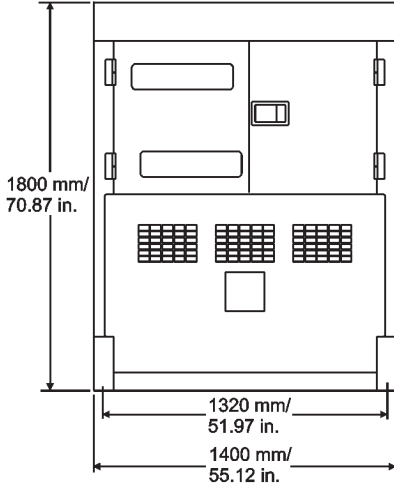

Weight

| | |
|-----------------------------|---------------------|
| Dry Weight | 8,644 lbs (3920 kg) |
| Wet Weight | 9,769 lbs (4430 kg) |
| Max. Lifting Point Capacity | 16500 lbs (7484 kg) |

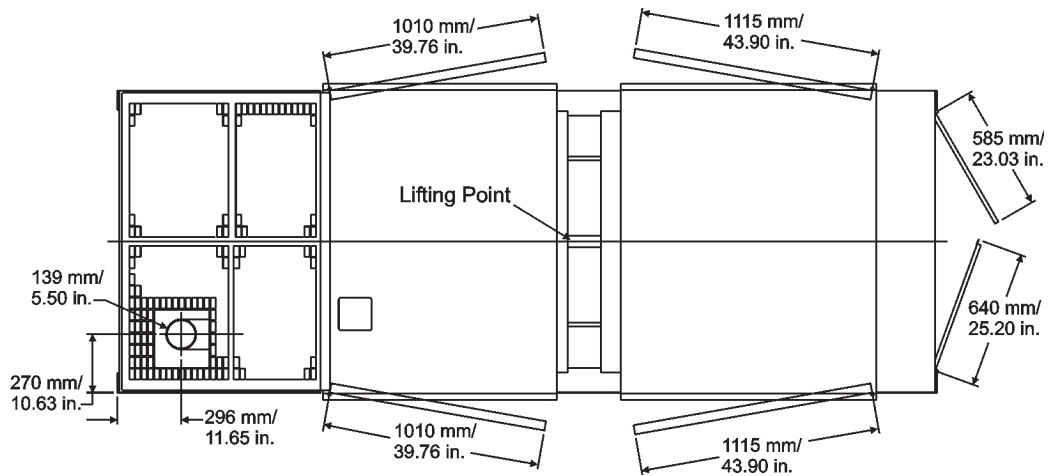

Units manufactured by Denyo Corp.

Your MQ Power dealer is:



MQ POWER
 POST OFFICE BOX 6254
 CARSON, CA 90749
 310-537-3700 • 800-421-1244
 FAX: 310-632-2656
 E-MAIL: mq@multiquip.com
 WEBSITE: www.mqpower.com