




# TRLR325XF

## Tandem Axle Trailer

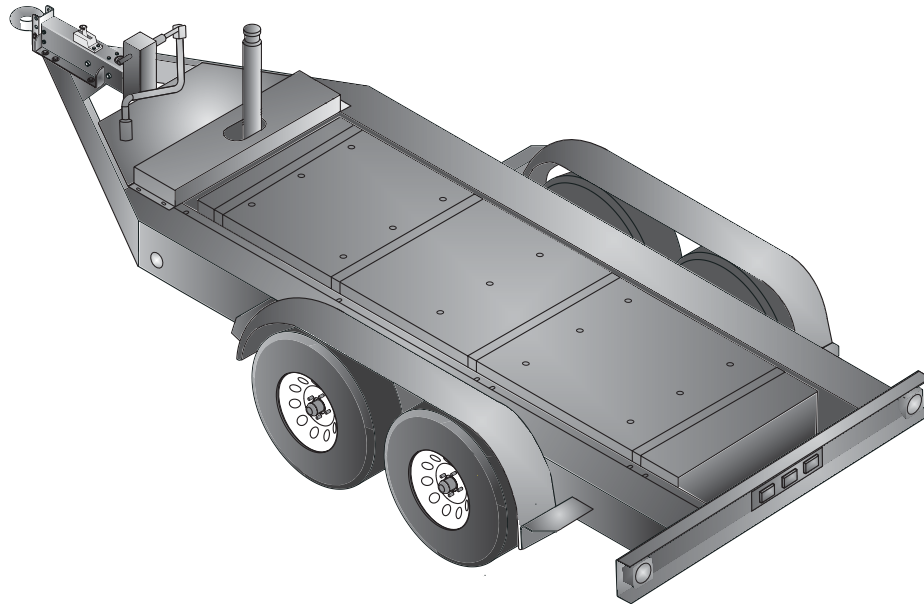

| TRLR325XF Technical Data           |                  |                    |                                |
|------------------------------------|------------------|--------------------|--------------------------------|
| Gross Vehicle Weight Rating (GVWR) | 18,000 lbs       | Tire Size          | 235/75R17.5 LR-H               |
| Gross Axle Weight Rating (GAWR)    | 10,000 lbs (ea.) | Wheel Bolt Pattern | 8 x 6.5                        |
| Actuator Rating                    | 20,000 lbs       | Tire Load Rating   | 6,005 lbs (ea.)                |
| Pintle Eye Coupler Rating          | 20,000 lbs       | Dimensions (LxWxH) | See Dimensions on reverse page |

### Standard Trailer Equipment

- Fits MQ Power Generator Models DCA250SSI, DCA300SSC, DCA300SSK
- Straight Tandem-axle Design with Leaf Spring Suspension
- H.D. Welded Steel Frame Construction
- Structural Channel for Generator Mounting and Support
- Integral Fuel Cell; Single-wall Steel Design; 300-gallon Capacity
- Replaceable, Bolt-on Hydraulic Brake Actuator
- Surge Hydraulic-actuated Drum Brakes (all axles)
- Hydraulic Uni-servo Drum Brakes - 12-inch Cluster (allows 15-20% braking in reverse)
- D.O.T. Steel Brake Lines, Brass Tees & Rubber Hydraulic Brake Hoses
- 4-hole Channel Allows 3-position, Adjustable Coupler Height; 4-inches O/A
- 3-inch Pintle-eye Coupler, Rated 20,000 lbs
- Heavy-duty, Tongue Mounted, Drop-leg Jack (rated 10,000 pound lift)
- Replaceable, Bolt-on Steel Fenders
- High-gloss Enamel Coated Frame, Channel, Actuator & Fenders
- D.O.T. Approved Tail Lamps, Stop Lamps, Turn Signal Lamps, Side Marker Lamps
- Weatherproof, Rubber Armored, 3-piece Trailer Light Wiring Harness




# TRLR325XF

## Tandem Axle Trailer

### Optional Trailer Equipment

- Bolt-on Electric Brake Coupler Plate with Electric-actuated Drum Brakes (all axles)
- Anti-Theft Wheel Lock
- Tongue Mounted Utility Storage Box
- Electric Breakaway Safety Device (electric-actuated brakes)
- Rear Stabilizer Stands
- Spare Tire with Locking Mount

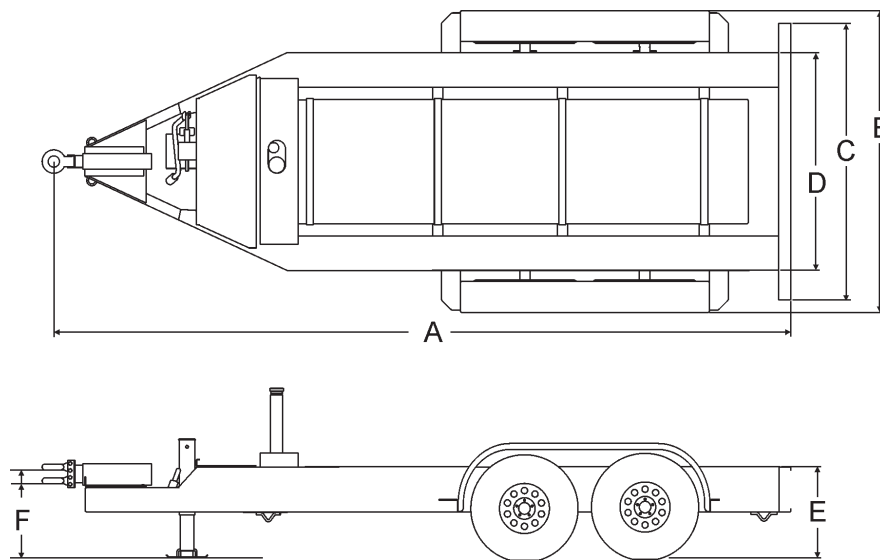

| Trailer Dimensions    |        |        |        |                       |        |        |
|-----------------------|--------|--------|--------|-----------------------|--------|--------|
| A                     | B      | C      | D      | E                     | F      |        |
|                       |        |        |        |                       | Min.   | Max.   |
| 234 in.               | 96 in. | 88 in. | 69 in. | 33 in.                | 27 in. | 31 in. |
| Trailer Weight        |        |        |        |                       |        |        |
| without fuel          |        |        |        | with fuel             |        |        |
| 3,860 lbs (1,751 kg)* |        |        |        | 5,990 lbs (2,717 kg)* |        |        |

\* Weight is approximate

Your MQ Power dealer is:



### MQ POWER

POST OFFICE BOX 6254

CARSON, CA 90749

310-537-3700 • 800-421-1244

FAX: 310-632-2656

E-MAIL: [mqpower@multiquip.com](mailto:mqpower@multiquip.com)

WEBSITE: [www.mqpower.com](http://www.mqpower.com)