


TRLR150XF Tandem Axle Trailer

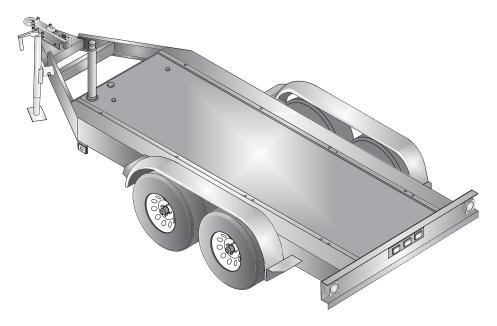

TRLR150XF Technical Data								
Gross Vehicle Weight Rating (GVWR)	10,000 lbs	Tire Size	ST235/80R16 LR-E					
Gross Axle Weight Rating (GAWR)	6,000 lbs (ea.)	Wheel Bolt Pattern	8 Lug on 6.5 in					
Actuator Rating	12,500 lbs	Tire Load Rating	3,500 lbs (ea.)					
Coupler Rating	See Coupling Options on reverse page	Dimensions (LxWxH)	See Dimensions on reverse page					

Standard Trailer Equipment

- Fits MQ Power Generator Model DCA150SSJU3
- Tandem-axle Design with Leaf Spring Suspension
- H.D. Welded Steel Frame Construction
- Structural Channel for Generator Mounting and Support
- Integral Fuel Cell; Single-wall Steel Design; 200-gallon Capacity
- Replaceable, Bolt-on Hydraulic Brake Actuator
- Surge Hydraulic-actuated Drum Brakes (all axles)
- Hydraulic Uni-servo Drum Brakes with Free-backing Plates 12-inch Cluster
- D.O.T. Steel Brake Lines, Brass Tees & Rubber Hydraulic Brake Hoses
- 4-hole Channel Allows 3-position, Adjustable Coupler Height; 4-inches O/A
- Tongue Mounted Swivel Jack with Flat Disc-foot (rated 5,000 pound lift)
- Replaceable, Bolt-on Steel Fenders
- Powder Coat Paint Process including: Frame, Channel, Actuator & Fenders
- D.O.T. Approved Tail Lamps, Stop Lamps, Turn Signal Lamps, Side Marker Lamps
- Weatherproof, Rubber Armored, 3-piece Trailer Light Wiring Harness





TRLR150XF Tandem Axle Trailer

Optional Trailer Equipment

- Bolt-on Electric Brake Coupler Plate with Electric-actuated Drum Brakes (all axles)
- Electric Breakaway Safety Device (electric-actuated brakes)
- Adjustable 2 5/16-inch Ball Coupler
- Adjustable 3-inch Pintle-eye Coupler
- Rear Stabilizer Stands
- Tongue Mounted Utility Storage Box
- Anti-Theft Wheel Lock
- Spare Tire with Locking Mount

Coupler Options					
3" PINTLE EYE 20,000 lbs					
#EE36264					
2-5/16" BALL COUPLER 14,000 lbs					
#EE43253					

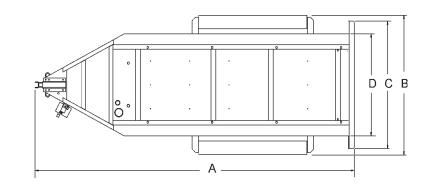



Trailer Dimensions								
Α	В	С	D	Е	_E F			
A	A B C D E	L	Min	Max				
195 in.	83 in.	75 in.	60 in.	28.5 in.	25.7 in	29.7 in.		
Trailer Weight								
without fuel			with fuel					
2,480 lbs (1,125 kg) *			3,946 (1,790 kg) *					
* \\\-!\\\-!\\\-!\\\\-!\\\\\\\\\\\\\\\\\								

* Weight is approximate



Cessco Inc. 4222 NE Columbia Blvd. Portland, OR 97218



Toll Free: 1-800-882-4959



MQ POWER

POST OFFICE BOX 6254 CARSON, CA 90749 310-537-3700 • 800-421-1244 FAX: 310-632-2656

E-MAIL: mqpower@multiquip.com WEBSITE: www.mqpower.com